

Light Up Happiness



LED FEATURES

25,000[#]
HOURS

VSP
VOLTAGE
SURGE
PROTECTION

2 YEAR
WARRANTY

ECO-FRIENDLY
LIGHTS

GLARE-FREE

~~Hg~~
NO MERCURY



Presenting,

The BAJAJ CORONA 3 in 1 DIMMABLE LED BULB.

Experience versatile lighting of three different intensities at your fingertips.



3 different light intensities in a single bulb with a regular on/off switch.



Available in 8W and 12W variants.



STAGE 1 - Bright light (100%)



STAGE 2 - Medium light (50%)



STAGE 3 - Dim light (25%)



CORONA 3 STEP DIMMING LED BULB 8W | 12W

- 3 Step Dimming with light output of 100% at stage 1, 50% at stage 2, 25% at stage 3
- 100 lm/Watt
- 2.5 kV Voltage Surge Protection
- Beam Angle > 240°
- CRI > 80
- Power Factor > 0.9
- Wide operating voltage range 120V-300V AC
- Available in CDL (6500K) with B22 base cap only

85%*
POWER
SAVING

*Nearest incandescent bulb equivalent measured according to IEC 969 standards.



CORONA LED BULB 3W | 5W | 7W | 9W | 12W

- With inbuilt short circuit, thermal & over load protection
- 100 lm/Watt
- 2.5 kV Voltage Surge Protection
- Beam Angle > 240°
- CRI > 80
- Power Factor > 0.9
- Available in CDL (6500K)
- Wide operating voltage range 100V-300V AC
- Available in B22 base cap only

85%*
POWER
SAVING

*Nearest incandescent bulb equivalent measured according to IEC 969 standards.




LEDZ BULB 3W | 4.5W | 7W | 9W | 12W | 15W | 18W

- Energy efficient LED retrofit bulb
- 110 lm/Watt for 18W
- 90 lm/Watt for 3W, 4.5W, 7W, 9W, 12W & 15W
- 2.5 kV Voltage Surge Protection
- Beam Angle > 120°
- CRI > 70
- Available in CDL (6500K) and WDL (3000K)
- Wide operating voltage range 100V-300V AC
- Available in B22 and E27 base caps

85%*
POWER
SAVING

*Nearest incandescent bulb equivalent measured according to IEC 969 standards.

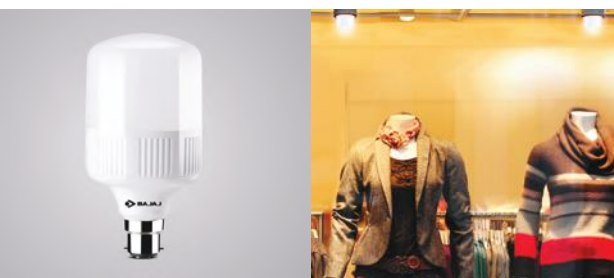

LED HIGH WATTAGE LAMPS 20W | 30W | 40W

- Energy efficient LED retrofit lamp
- 90 lm/Watt
- 2.5 kV Voltage Surge Protection
- Beam Angle > 220°
- CRI > 80
- Power Factor > 0.9
- Available in CDL (6500K)
- Wide operating voltage range 100V-300V AC
- Suitable for indoor and outdoor applications like walkways, retail stores, etc.

50%*
POWER
SAVING

*Compared to nearest equivalent CFLs.



LED CANDLE LAMP

- Available in clear & frosted version
- Available in E14 and E27 base cap
- 2.5 kV Voltage Surge Protection
- CRI > 80
- Available in CDL (6500K) and WDL (3000K)
- Wide operating voltage range 100V-300V AC
- Applications in chandeliers, wall-mounted and ceiling-mounted decorative fixtures

85%*
POWER
SAVING

*Nearest incandescent bulb equivalent measured according to IEC 969 standards.



LED DECO PING PONG 0.5W

- Wide operating voltage range 160V-260V AC
- Available in white, red, blue, green and yellow colour
- Unbreakable

85%*
POWER
SAVING

*Nearest incandescent bulb equivalent measured according to IEC 969 standards.



LED BATTEN 28W

- 100 lm/Watt, lumen output of 2800 lm
- 2.5 kV Voltage Surge Protection
- Power factor > 0.9
- Extruded power coated aluminium housing
- Elegant endcaps
- Elegantly designed to deliver glare-free light
- Available in CDL (6500K)
- Specially designed heat sink for enhanced life
- Wide operating voltage range 100V-300V AC
- Applications in home lighting, offices, parking lots, etc.

40%*
POWER
SAVING

*Compared to nearest equivalent T12 fittings.



LED BATTEN 6W | 9W | 18W

- 100 lm/Watt
- 2.5 kV Voltage Surge Protection
- Power factor > 0.9
- Extruded power coated aluminium housing
- Elegant endcaps
- Elegantly designed to deliver glare-free light
- Available in CDL (6500K)
- Specially designed heat sink for enhanced life
- Wide operating voltage range 100V-300V AC
- Applications in home lighting, offices, parking lots, etc.

50%*
POWER
SAVING

*Compared to nearest equivalent T8 FTL fittings.



LED BATTEN 20W

- 100 lm/Watt
- 2.5 kV Voltage Surge Protection
- Power factor > 0.9
- Elegant endcaps
- Elegantly designed to deliver glare-free light
- Housing made of engineering plastic
- Wide operating voltage range 100V-300V AC
- Applications in home lighting, offices, parking lots, etc.

50%*
POWER
SAVING

*Compared to nearest equivalent T8 FTL fittings.



LED TUBELIGHT WITH FITTING 20W

- 100 lm/Watt
- 2.5 kV Voltage Surge Protection
- Power factor > 0.9
- Glass tube
- Glare-free light output
- Easy installation
- Wide operating voltage range 100V-300V AC
- Applications in home lighting, offices, parking lots, etc.

50%*
POWER
SAVING

*Compared to nearest equivalent T8 FTL fittings.



LED SPOT LIGHT **2W**

- Wide operating voltage range 160-260V AC
- 2.5 kV Voltage Surge Protection
- Available in CDL (6500K) and WDL (3000K)
- Made of powder coated aluminium housing
- Wide operating voltage range 100V-300V AC
- Application in cabinets, wall units, etc.



LED DOWNLIGHT **3W | 5W**

- Elegantly designed to deliver glare-free light
- 2.5 kV Voltage Surge Protection
- Power factor > 0.9
- Specially designed heat sink for enhanced life
- Available in CDL (6500K) and WDL (3000K)
- Wide operating voltage range 100V-300V AC
- Applications in home lighting, offices, indoor walkways, etc.

60%*
POWER
SAVING

*Compared to conventional PL Downlights.



LED PANEL SQUADRA / CIRCA **3W | 6W | 9W | 12W | 15W | 18W**

- Elegantly designed diffuser and EDGE lit technology for glare-free light
- 2.5 kV Voltage Surge Protection
- Power factor > 0.9
- Slim and elegant look
- Made of powder coated extruded aluminium housing
- Specially designed heat sink for enhanced life
- Available in CDL (6500K) and WDL (3000K)
- Recess type mounting
- Wide operating voltage range 100V-300V AC
- Applications in home lighting, offices, indoor walkways, etc.

60%*
POWER
SAVING

*Compared to conventional PL Downlights.



LED MINI FLOOD **10W | 20W | 30W**

- 90 lm/Watt
- 2.5 kV Voltage Surge Protection
- Power factor > 0.9
- Housing made of die cast aluminium in glossy black finish
- IP 65 protection
- Available in CDL (6500K)
- Wide operating voltage range 100V-300V AC
- Applications in billboards, buildings, monuments, festive pandals, etc.

85%*
POWER
SAVING

*Nearest halogen equivalent measured according to IEC 969 standards.

FEATURES OF BAJAJ LED RANGE[^]

**25,000[#]
HOURS**



**2 YEAR
WARRANTY**
ECO-FRIENDLY
LIGHTS



[#]Mean life time between failure. | [^]Features may vary as per models.

D-LITE RANGE - LANTERNS, TORCHES & TABLE LAMPS



DESCRIPTION	LED GLOW ASHA SOLAR LANTERN
No. of LEDs	24
Battery	3.7V / 2200 mAh Li-ion
Recharge time	8 to 10 hours
Discharge time*	Up to 8 hours
Other features	3W solar panel & 3 mode switch 1000 times rechargeable



DESCRIPTION	LED GLOW 648 LR LANTERN	LED GLOW 430 LR LANTERN	LED GLOW 424 LRD LANTERN
No. of LEDs	48	30	24
Battery	6V / 4000 mAh powerful sealed lead acid	3.7V / 2200 mAh Li-ion	3.7V / 2200 mAh Li-ion
Recharge time	9 to 10 hours	6 to 8 hours	6 to 8 hours
Discharge time*	Up to 24 hours	Up to 7 hours	Up to 14 hours
Other features	High backup Heavy duty battery 250 times rechargeable	3 mode glow switch with mobile charging option. 1000 times rechargeable	3 mode switch 1000 times rechargeable



DESCRIPTION	SMART GLOW SENIOR 12 LED RC TORCH	SMART GLOW CURVE 6 LED RC TORCH
No. of LEDs	12	6
Battery	4V / 900 mAh lead acid	4V / 600 mAh lead acid
Recharge time	9 to 10 hours	9 to 10 hours
Discharge time*	Up to 8 hours	Up to 8 hours
Other features	2 mode switch 7 & 12 LEDs 250 times rechargeable	2 mode switch 3 & 6 LEDs 250 times rechargeable



DESCRIPTION	SMART GLOW MINIZ 4 LED RC TORCH	SMART GLOW 1W HI-POWER LED RC TORCH	SMART GLOW 0.5W LED RC TORCH
No. of LEDs	4	One 1W LED	One 0.5W LED
Battery	4V / 800 mAh lead acid	4V / 1500 mAh	3.6V / 80 mAh
Recharge time	9 to 10 hours	9 to 10 hours	9 to 10 hours
Discharge time*	Up to 8 hours	Up to 8 hours	Up to 3 hours
Other features	Compact and Handy 250 times rechargeable	2 mode switch 250 times rechargeable	Compact and Handy 500 times rechargeable



DESCRIPTION	SMART GLOW 0.5W LED TORCH	SMART GLOW CHAMAK / CHAMAK RADIUM LED TORCH
No. of LEDs	One 0.5W LED	<ul style="list-style-type: none"> • 20 times more battery life as compared to conventional torch • White LED light of 3.2V / 30 mAh, 9000 mcd and life of up to 50,000 hours • Illuminance at 1 metre: More than 500 lux • Sling for easy handling • Radium glow body for chamak radium • Available in 3 colours: black, red & yellow
Battery	3 AA	
Recharge time	NA	
Discharge time*	Up to 25 hours	
Other features	Battery saving switch	



*With intermittent use.



DOSTI LED RC TORCH 3W

- One 3W hi-power LED
- 3.7V / 4000 mAh Li-ion battery
- Charging time up to 7 hours
- Discharge time up to 14 hours
- Durable ABS housing



*With intermittent use.



LED TABLE LAMP SOFTLITE

- 5W LED table lamp
- Cool day light
- Sturdy ABS housing with metal bottom
- Adapter input: AC 100~270V, 50/60Hz
- Adapter output: DC 24V, 0.375A
- 3 mode feather touch switch - high, medium & low



OTHER AVAILABLE PRODUCT RANGE: Compact Fluorescent Lamp (CFL), Fluorescent Tube Light (FTL), Incandescent Lamp (GLS), Consumer Luminaires and Spike Guard.